





0 20 40
HORIZONTAL
SCALE IN FEET

CALCULATED
CAN
CHECKED
DEK

MAINTENANCE OF TRAFFIC PHASE FOUR
STA. 54+00 TO STA. 59+00

SCI-138-11.44

ESTIMATED QUANTITIES												
REF No.	Station to Station	SIDE	614			615	615	622				
			WORK ZONE IMPACT ATTENUATOR, 24" WIDE HAZARDS, (BIDIRECTIONAL) EACH	BARRIER REFLECTOR, TYPE 1 (BIDIRECTIONAL) EACH	OBJECT MARKER, TWO WAY EACH	WORK ZONE CENTER LINE, CLASS I, 740.06, TYPE 1 (DOUBLE SOLID) MILE	WORK ZONE EDGE LINE, CLASS I, 6", 704.06, TYPE 1 (WHITE) MILE	WORK ZONE STOP LINE, CLASS I, 6", 740.06, TYPE I FT	PAVEMENT FOR MAINTAINING TRAFFIC, CLASS A, AS PER PLAN SY	PORTABLE BARRIER, UNANCHORED FT		
CL-1	54+00 to 57+83	Rt.				0.07						
CL-2	8+55 Kipper Rd. to 9+70 Kipper Rd.	Rt.				0.02						
CL-3	10+15 Kipper Rd. to 11+45 Kipper Rd.	Lt.				0.03						
CL-4	58+75 to 59+00	Rt.				0.01						
EL-1	54+00 to 8+55 Kipper Rd	Rt.					0.09					
EL-2	54+00 to 12+00 Kipper Rd.	Lt.					0.12					
EL-3	8+55 Kipper Rd. to 59+00	Rt.					0.04					
EL-4	11+45 Kipper Rd. to 59+00	Lt.					0.03					
SL-1	10+15 Kipper Rd	Lt.							24			
SL-2	9+70 Kipper Rd.	Rt.							20			
PCB-1	54+00 to 11+48 Kipper Rd.	Lt.		11	11						578	
IA-1	11+48 Kipper Rd. to 11+73 Kipper Rd.	Lt.	1									
TP-1	10+50 Kipper Rd. to 11+70 Kipper Rd.	Rt.							20			
TOTALS CARRIED TO SUBSUMMARY			1	11	11	0.13	0.28	44	20		578	

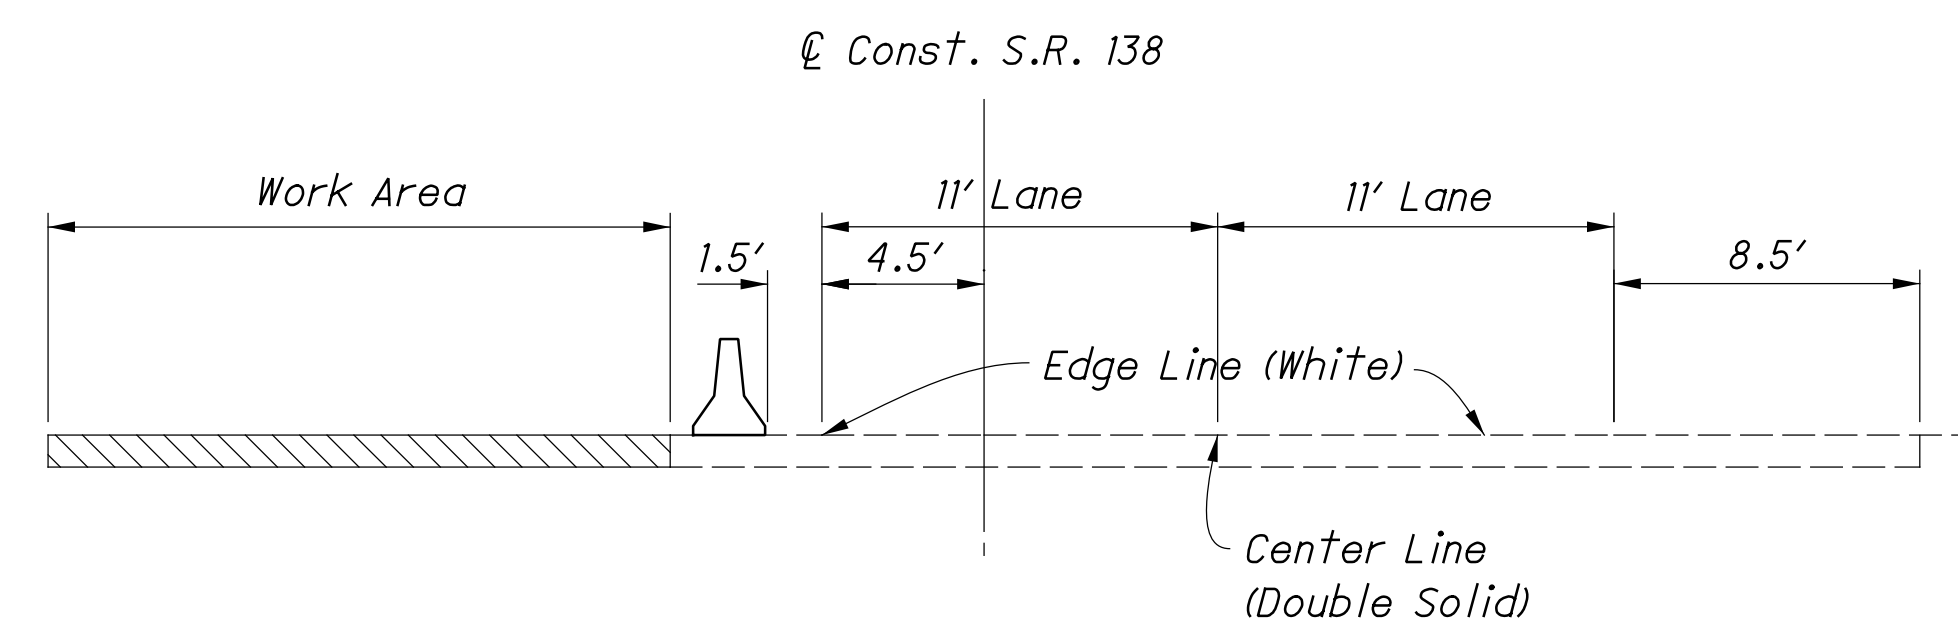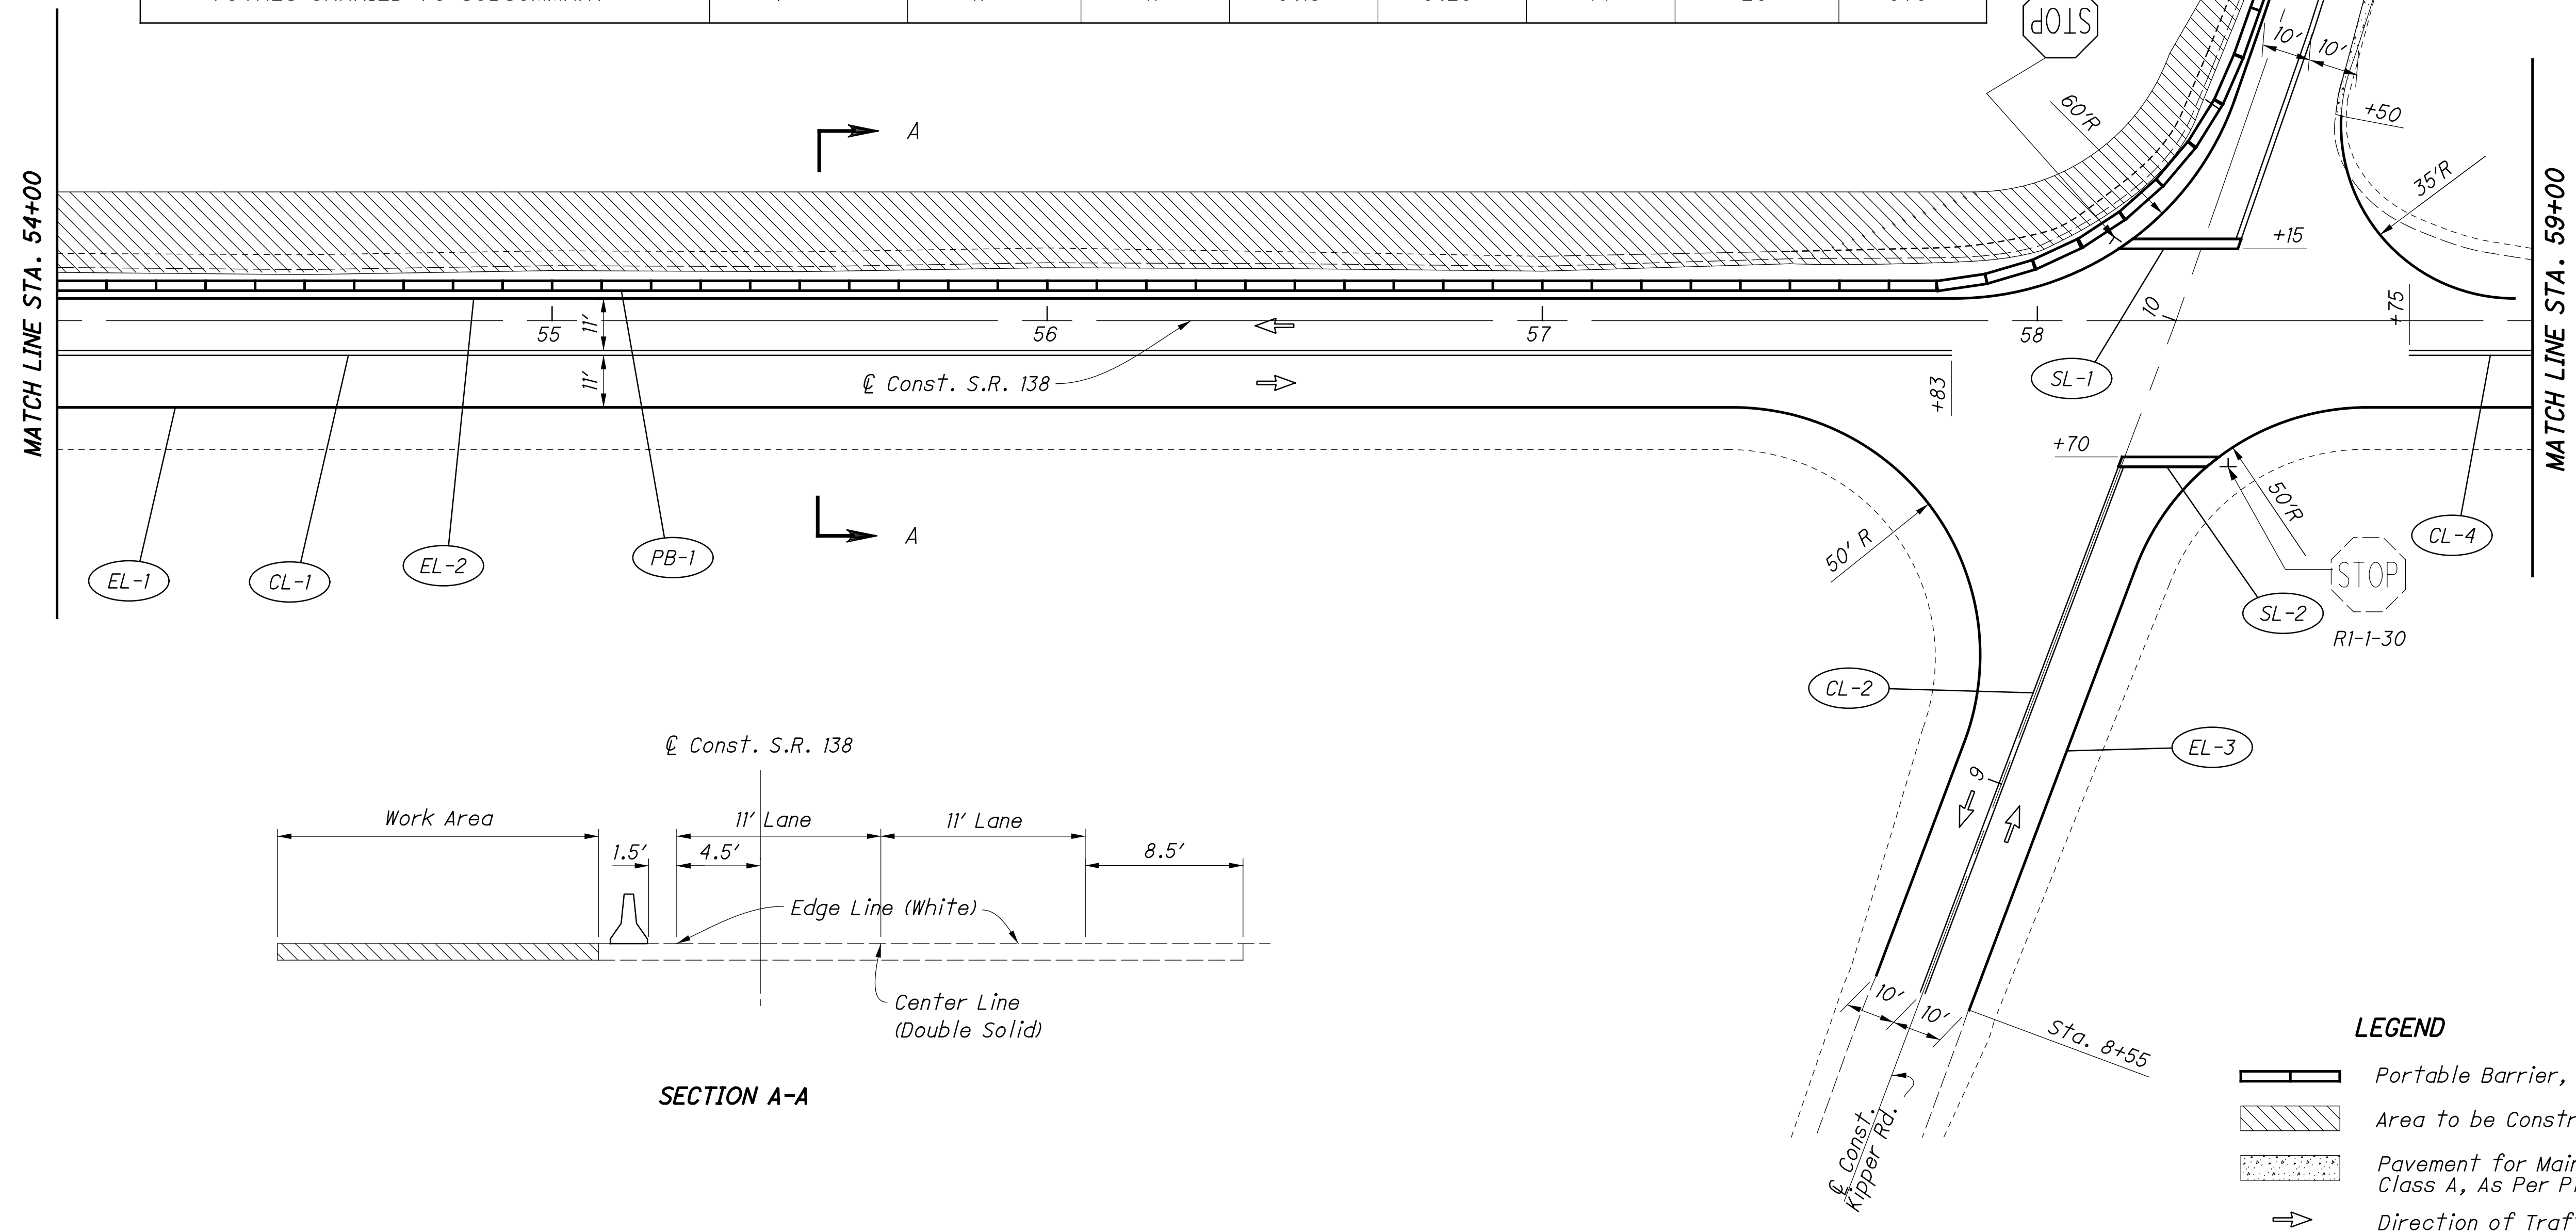

- LEGEND**
- Portable Barrier, Unanchored
 - Area to be Constructed
 - Pavement for Maintaining Traffic, Class A, As Per Plan
 - Direction of Traffic